


TP 1755

0,1 LT (1) LB

Dimensions

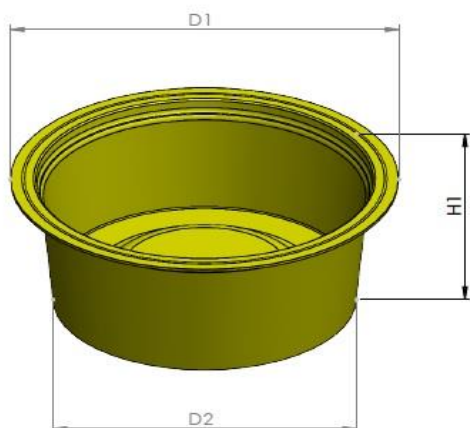

Shape :	Rectengular
D-1	94 mm +/- %1
D-2	73,4 mm +/- %1
H-1	36,2 mm +/- %1

Volume

Brimful Volume :	130 cc
Iso Volume :	-

Weight

Weight container / pot	7 gr. +/- 1 gr.
Weight standard lid	-

Performance

Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably , plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1755 must be tested by the customer with the actual product before approval for use at hot temperatures.

Handle

Available handle	-	Handle type	-
------------------	---	-------------	---

Closure System

Lid type options	-
Closure type	-
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap

Decoration

Decoration Available :	<input checked="" type="checkbox"/> Offset	Decoration area offset	244 mm x 28 mm
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	250 mm x 33 mm
		Decoration area IML(Lid)	-

Packaging (Per both bucket and lid)

	1000 X 1200
On pallet	819.000 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	17.199.000 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	21.294.000 pcs.

Raw Material

Quality Specifications



ISO 9001 - 2015
ISO 22000 - 2005

