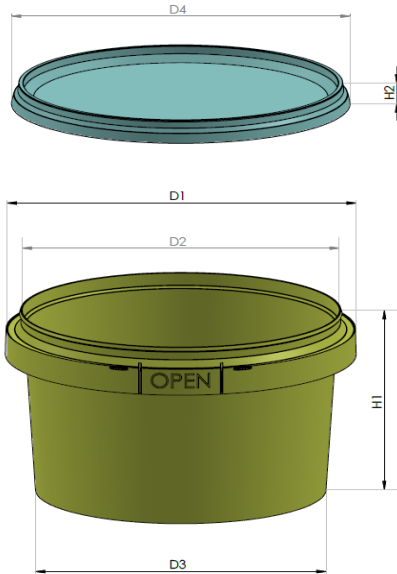


TP 1756 - 1707
0,5 LT (3)
Dimensions


Shape :	Round Conical
D-1	124,5 mm +/- %1
D-2	112,5 mm +/- %1
D-3	103,1 mm +/- %1
D-4	121,5 mm +/- %1
H-1	73 mm +/- %1
H-2	8,6 mm +/- %1

Volume

Brimful Volume :	635 cc
Iso Volume :	580 cc

Weight

Weight container / pot	19,9 gr. +/- 2 gr.
Weight standard lid	8,7 gr. +/- 1 gr.

Performance


Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably, plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1756-1707 must be tested by the customer with the actual product before approval for use at hot temperatures.

Handle

Available handle	Handle type	Flexible Plastic
------------------	-------------	------------------

Closure System

Lid type options	Standard Lid
Closure type	Snap-On
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap




Decoration

Decoration Available :	<input type="checkbox"/> Offset	Decoration area IML(Pail)	57 mm * 348 mm
	<input checked="" type="checkbox"/> IML	Decoration area IML(Lid)	103,5 mm

Packaging (Per both lid and pail)

	1000 X 1200
On pallet	5.940 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	124.740 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	154.440 pcs.

Raw Material
Quality Specifications

PP			ISO 9001 - 2015 ISO 22000 - 2005
----	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------	-------------------------------------

