


TP 1568-1569 18 LT Dimensions

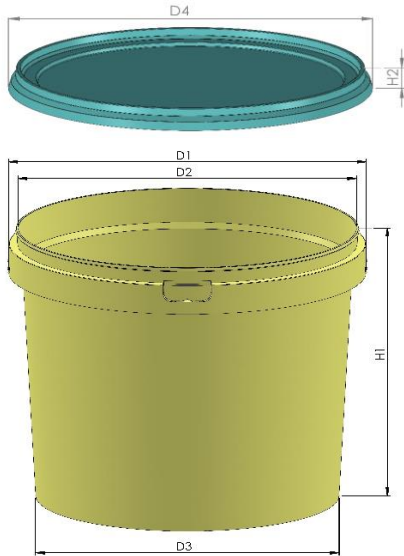

Shape :	Round Conical
D-1	332,5 mm +/- %1
D-2	314,4 mm +/- %1
D-3	282,1 mm +/- %1
D-4	330,7 mm +/- %1
H-1	285 mm +/- %1
H-2	18,3 mm +/- %1

Volume

Brimful Volume :	19080 cc
Iso Volume :	18320 cc

Weight

Weight container / pot	485,9 gr. +/- 5 gr.	Weight standard handle	23,5 gr. +/- 0,5 gr.
Weight standard lid	122,5 gr. +/- 3 gr.		

Performance


Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably, plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1568-1569 must be tested by the customer with the actual product before approval for use at hot temperatures.

Handle

Available handle	TP 1564	Handle type	Flexible Plastic
------------------	---------	-------------	------------------

Closure System

Lid type options	Standard Lid
Closure type	Snap-On
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap





Decoration

Decoration Available :	<input checked="" type="checkbox"/> Offset	Decoration area offset	205 mm x 913 mm
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	240 mm x 925 mm
		Decoration area IML(Lid)	-

Packaging (Per both lid and pail)

	1000 X 1400
On pallet	456 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	16 pallet
Amount of pcs per 40" HC	7.296 pcs.
Amount of pallets per truck	22 pallet
Amount of pcs per truck	10.032 pcs.

Raw Material Quality Specifications

PP   ISO 9001 - 2008
ISO 22000 - 2005

