


TP 1722 - 1723

200 ML (1) TR

Dimensions

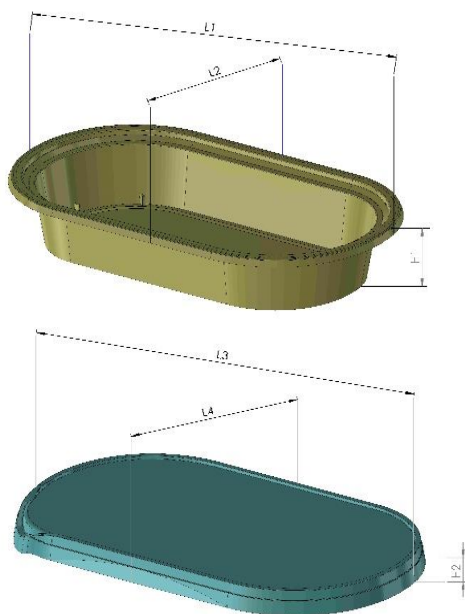

Shape :	Rectengular
L-1	160,4 mm +/- %1
L-2	88,4 mm +/- %1
L-3	161,3 mm +/- %1
L-4	90 mm +/- %1
H-1	33,2 mm +/- %1
H-2	11,4 mm +/- %1

Volume

Brimful Volume :	240 cc
Iso Volume :	200 cc

Weight

Weight container / pot	11 gr. +/- 1 gr.
Weight standard lid	8,9 gr. +/- 0,5 gr.

Performance

Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably , plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1722 - 1723 must be tested by the customer with the actual prodcut before approval for use at hot temperatures.

Handle

Availiable handle	-	Handle type	Flexible Plastic
-------------------	---	-------------	------------------

Closure System

Lid type options	Standard Lid
Closure type	Sealing lid
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap



Decoration

Decoration Available :	<input type="checkbox"/> Offset	Decoration area offset	-
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	30 mm x 360 mm
		Decoration area IML(Lid)	84 mm x 156 mm

Packaging (Per both bucket and lid)

	1000 X 1200
On pallet	11.340 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	238.140 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	294.840 pcs.

Raw Material

Quality Specifications



ISO 9001 - 2008
ISO 22000 - 2005

