


TP 1661 - 1665 250 ML (3) US Dimensions

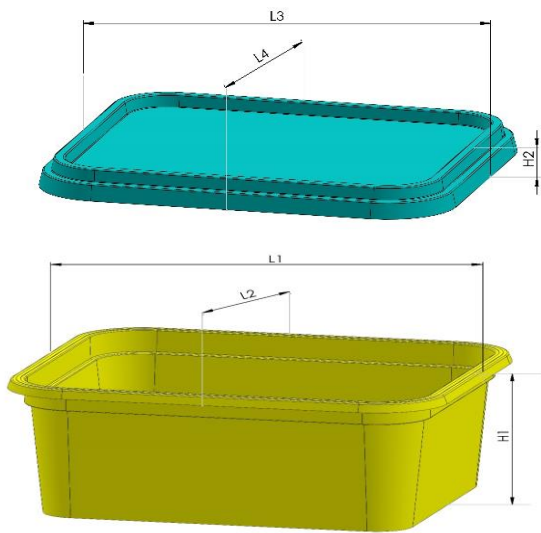

Shape :	Rectengular
L-1	139,5 mm +/- %1
L-2	119,2 mm +/- %1
L-3	138,3 mm +/- %1
L-4	117,9 mm +/- %1
H-1	38,4 mm +/- %1
H-2	11 mm +/- %1

Volume

Brimful Volume :	474 cc
Iso Volume :	323 cc

Weight

Weight container / pot	16,1 gr. +/- 1 gr.
Weight standard lid	11,7 gr. +/- 0,5 gr.

Performance

Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably , plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1661 - 1665 must be tested by the customer with the actual prodcut before approval for use at hot temperatures.

Handle

Availiable handle	-	Handle type	Flexible Plastic
-------------------	---	-------------	------------------

Closure System

Lid type options	Standard Lid
Closure type	Sealing lid
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap





Decoration

Decoration Available :	<input type="checkbox"/> Offset	Decoration area offset	-
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	27 mm x 430 mm
		Decoration area IML(Lid)	103 mm x 123 mm

Packaging (Per both bucket and lid)

	1000 X 1200
On pallet	7.560 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	158.760 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	196.560 pcs.

Raw Material Quality Specifications

PP   ISO 9001 - 2008
ISO 22000 - 2005

