


**TP 1656-1597      4 LT (3)      Dimensions**

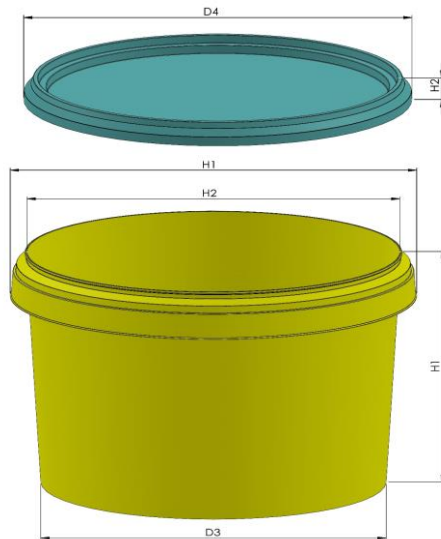

Shape :	Round Conical
D-1	225,6 mm +/- %1
D-2	206,7 mm +/- %1
D-3	192,0 mm +/- %1
D-4	222 mm +/- %1
H-1	154,0 mm +/- %1
H-2	11,5 mm +/- %1

**Volume**

Brimfull Volume :	4670 cc
Iso Volume :	3967 cc

**Weight**

Weight container / pot	110 gr. +/- 3 gr.	Weight standard handle	6,5 gr. +/- 0,3 gr.
Weight standard lid	44,5 gr. +/- 2 gr.		

**Performance**

Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably, plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1656-1597 must be tested by the customer with the actual product before approval for use at hot temperatures.

**Handle**

Available handle	TP 1560	Handle type	Flexible Plastic
------------------	---------	-------------	------------------

**Closure System**

Lid type options	Standard Lid
Closure type	Snap-On
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap





**Decoration**

Decoration Available :	<input checked="" type="checkbox"/> Offset	Decoration area offset	110 mm x 608 mm
	<input type="checkbox"/> IML	Decoration area IML(Pail)	-
		Decoration area IML(Lid)	118 mm, 132 mm, 142 mm, 155 mm, 164 mm.

**Packaging (Per both lid and pail)**

	1000 X 1200
On pallet	1.360 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	28.560 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	35.360 pcs.

**Raw Material      Quality Specifications**

PP   ISO 9001 - 2008  
ISO 22000 - 2005

