


TP 1745-1728

500 ML (12) TK

Dimensions

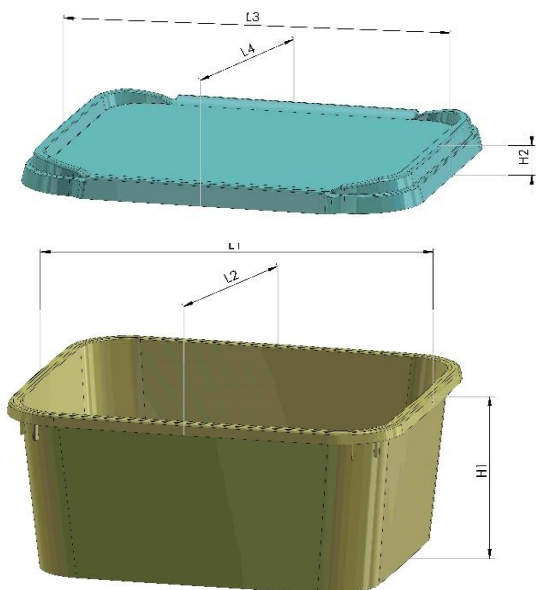

Shape :	Rectengular
L-1	140 mm +/- %1
L-2	120 mm +/- %1
L-3	142,4 mm +/- %1
L-4	126,4 mm +/- %1
H-1	64 mm +/- %1
H-2	11,5 mm +/- %1

Volume

Brimful Volume :	740 cc
Iso Volume:	-

Weight

Weight container / pot	19,1 gr. +/- 1 gr.
Weight standard lid	11 gr. +/- 0,5 gr.

Performance

Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably , plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1745 - 1728 must be tested by the customer with the actual prodcut before approval for use at hot temperatures.

Handle

Available handle	-	Handle type	Flexible Plastic
------------------	---	-------------	------------------

Closure System

Lid type options	Standard Lid
Closure type	Sealing lid
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap



Decoration

Decoration Available :	<input type="checkbox"/> Offset	Decoration area offset	-
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	66 mm x 428 mm
	<input checked="" type="checkbox"/> Oxygen barrier IML	Decoration area IML(Lid)	140 mm x 122 mm

Packaging (Per both bucket and lid)

	1000X1200
On pallet	6.552 pcs.
Pallet Height	250 cm
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	137.592 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	170.352 pcs.

Raw Material

Quality Specifications

