


**TP 1662 - 1665      500 ML (5) US      Dimensions**

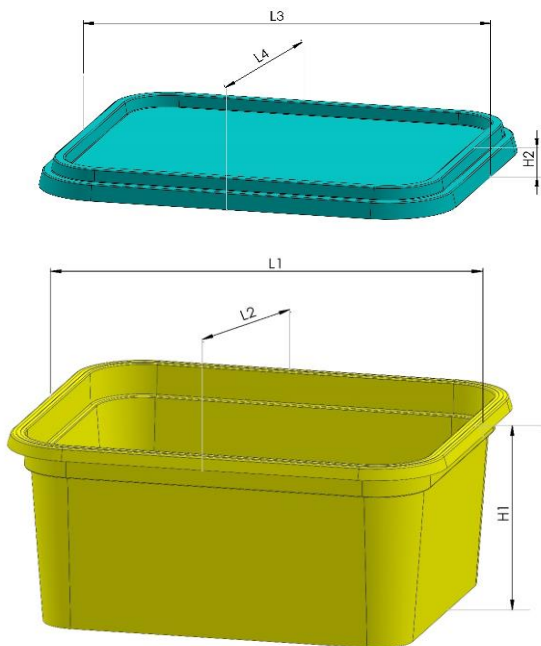

Shape :	Rectengular
L-1	139,5 mm +/- %1
L-2	119,2 mm +/- %1
L-3	138,3 mm +/- %1
L-4	117,9 mm +/- %1
H-1	65,3 mm +/- %1
H-2	11 mm +/- %1

**Volume**

Brimful Volume :	807 cc
Iso Volume :	655 cc

**Weight**

Weight container / pot	22,6 gr. +/- 1 gr.
Weight standard lid	11,7 gr. +/- 0,5 gr.

**Performance**


Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably , plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1662 - 1665 must be tested by the customer with the actual product before approval for use at hot temperatures.

**Handle**

Available handle	-	Handle type	Flexible Plastic
------------------	---	-------------	------------------

**Closure System**

Lid type options	Standard Lid
Closure type	Sealing lid
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap





**Decoration**

Decoration Available :	<input type="checkbox"/> Offset	Decoration area offset	-
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	54 mm x 430 mm
		Decoration area IML(Lid)	103 mm x 123 mm

**Packaging (Per both bucket and lid)**

	1000 X 1200
On pallet	7.200 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	151.200 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	187.200 pcs.

**Raw Material      Quality Specifications**

PP   ISO 9001 - 2008  
ISO 22000 - 2005

