


TP 1698 - 1699 2 LT SMALL Dimensions

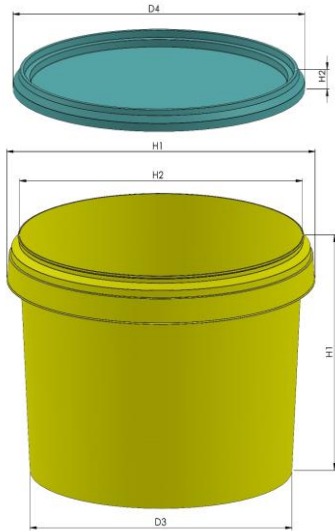

Shape :	Round Conical
D-1	189 mm +/- %1
D-2	179,5 mm +/- %1
D-3	149,6 mm +/- %1
D-4	184,3 mm +/- %1
H-1	130,6 mm +/- %1
H-2	9,9 mm +/- %1

Volume

Brimful Volume :	2498 cc
Iso Volume :	2143 cc

Weight

Weight container / pot	47,1 gr. +/- 3 gr.	Weight standard handle	2,6 gr. +/- 0,3 gr.
Weight standard lid	20 gr. +/- 1 gr.		

Performance


Hot filling	85-95 ° C
Hot temperatures	The material chosen has a very good heat resistance and the pails are suitable for hot filling. Notably, plastic pails become flexible when subjected to hot filling temperatures and care must be taken in relation to stacking immediately after hot filling. The TP 1607 - 1608 must be tested by the customer with the actual product before approval for use at hot temperatures.

Handle

Available handle	TP 1708	Handle type	Flexible Plastic
------------------	---------	-------------	------------------

Closure System

Lid type options	Standard Lid
Closure type	Snap-On
Protective collar	Yes
Tamper Evidence Type	Tamper Evidence tap





Decoration

Decoration Available :	<input checked="" type="checkbox"/> Offset	Decoration area offset	98 mm x 485 mm
	<input checked="" type="checkbox"/> IML	Decoration area IML(Pail)	113mm x 500 mm
		Decoration area IML(Lid)	118 mm, 132 mm, 142 mm,

Packaging (Per both lid and pail)

	1000 X 1200
On pallet	2.700 pcs.
Pallet Height	250 cm.
Amount of pallets per 40"HC	21 pallet
Amount of pcs per 40" HC	56.700 pcs.
Amount of pallets per truck	26 pallet
Amount of pcs per truck	70.200 pcs.

Raw Material Quality Specifications

PP   ISO 9001 - 2008
ISO 22000 - 2005

